




Tire del cable cuando ocurra alguna de las siguientes circunstancias:

- Cuando el cable o enchufe se encuentren dañados.
- Cuando la lámpara esté húmeda o en contacto con líquidos / lluvias.
- Cuando la lámpara este dañada por caídas.
- Cuando la lámpara produzca humo o chispas.
- Cuando las bombillas LED parpadeen anormalmente o estén dañadas.

 Tecla Volumen:

- 1- Gire a la izquierda para reducir el volumen, gire a la derecha para incrementarlo.
- 2- Cuando suene la alarma, tocando brevemente el botón de volumen a repetición, suena de nuevo después de 10 minutos, la alarma sonará tres veces, la función repetición finaliza.
- 3- Cuando suene la alarma, presione y mantenga el volumen para finalizar la función repetición.
- 4- Función temporizador sueño, Cuenta regresiva de 10, 20, 30, 60 minutos. Normalmente, cuando esta encendido, altavoz bluetooth o modo radio FM, presionar brevemente el volumen , encendiendo la función temporizador, y mostrará el icono “” y el tiempo de dormir, el primer toque son 10 minutos y el icono “” seguirá parpadeando, el segundo toque, el temporizador será de 20 minutos y el icono “” seguirá parpadeando, el tercer toque, el temporizador será de 30 minutos y el icono “” seguirá parpadeando , con el cuarto toque, el temporizador se apaga y no habrá parpadeo. Con el modo temporizador, si no se presiona durante 5 segundos, el temporizador empieza a funcionar y la pantalla vuelve a mostrar la hora.



China/USA

(Puede elegir en que día de la semana abrir o cerrar). La hora de encender la luz inmediatamente después de 10 minutos, despertador luz blanca.

⑨

⑩

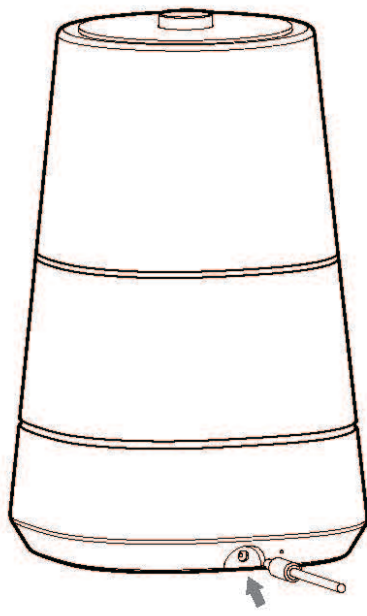


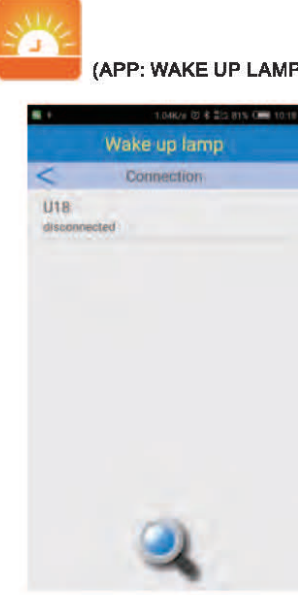
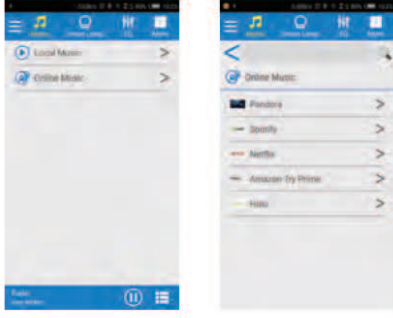
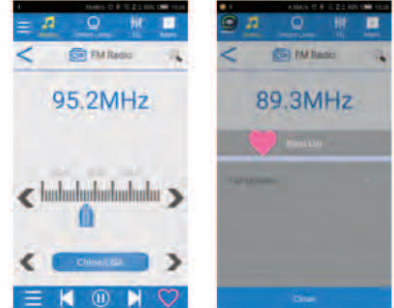
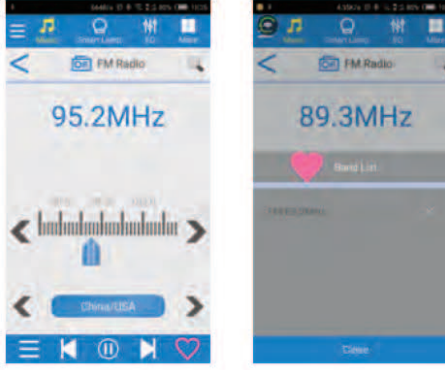
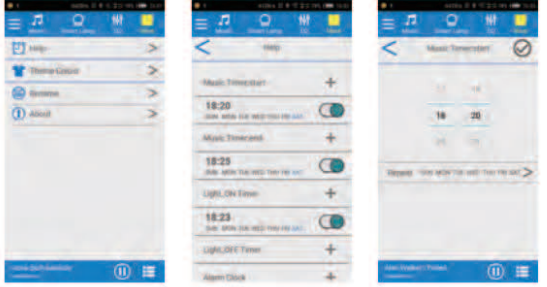
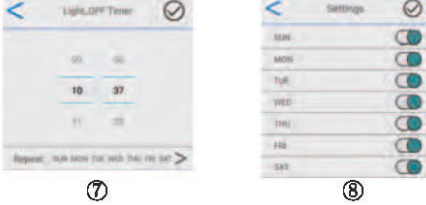
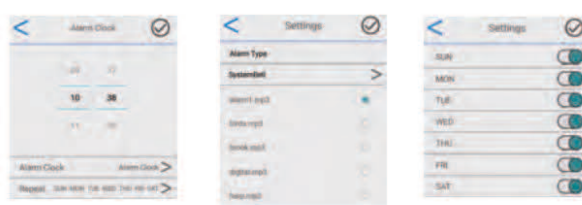
⑪

Presione en el nombre del aparato bluetooth para conectarlo.
 “✓” significa que se ha conectado correctamente.

- Hulu

Nota: esta función solo funciona con el software de Android y no es compatible con el software IOS.

• **Atención:** la aplicación de función tiempo no puede ser establecida al mismo tiempo que el apagado de luz, reloj alarma, el ajuste de tiempo debe ser diferente, así la aplicación puede funcionar correctamente.

 RADIO ALARM CLOCK LED/ RGB LUX  398021 USER MANUAL	Attention: - Please do not disassemble and refit the product so as to avoid electrical shock. - Please use the original power adaptor and power outlet for operation. - Please do not put the wake-up lamp in a high humidity place. - Please keep wake up lamp on flat and stable area to avoid any drop down damage. - Please use dry and soft cloth to clean up the lamp instead a corrosive detergent to wipe it. - Please pull out the plug when it is not being used for a long time. - Please do not use multiple electric appliance on the same plug in that case it would make short-circuit or fire disaster. - In order to avoid eye damage, please do not look the lamp directly. The treatment of Emergency Please pull out the plug when you meet these circumstance as following. -When this power line or plug damaged -When this lamp dampened or it contact with liquid/rains -When this lamp damaged from dropping off. -When this lamp is smoking or sparking. -When LED bulbs flicker abnormally or damaged.	Technical parameter - Bluetooth double module 4.0 version -Bluetooth wireless search name:U18 -Bluetooth wireless transmission distance≤ 10m -Output power:8W -Distortion rate :≤ 10% -SNR:75db -Wake-up lamp power:10W -Power adaptor:12V 1.5A -Speaker parameter:68MM 4 Ω 10W Product functions -Touch-button,easy to operate. -APP control -Wake-up function(Simulating the sun rises up slowly in the morning) -RGB light -Night light -Bluetooth Wireless audio -FM radio -Alarm -Timing wake-up -Snooze function -Sleep timer	Power connection  Attention: The power adaptor is adaptor for this lamp only,please do not use for other electric appliance.  Plug the power cord into the rear DC jack of the product base.	Functional operation  Power key:touch and hold this button for 2 second to turn ON/OFF;after it has turned on,the wireless signal"📶"on the right bottom of time screen will flashing quickly,after wireless is connected successfully it will keep blinking.(Turning on is wireless mode by default);Touching short on the button is invalid. Blue-toothswitch button:Short touch this button on FM mode will entry wireless mode.The wireless signal"📶" on the right bottom of time screen will flashing quickly,after wireless is connected successfully it will keep blinking.(Turning on is wireless mode by default);Touching short on the button is invalid.
"📶" FM radio switch button:On blue-tooth mode,touch FM button shortly,entry FM mode.On the right down of time screen,FM signal"📶" will keep blinking for a long time and shows HZ. "⏮" "Last song button:①On the Blue-tooth mode,touching short the button for a last song.②On the FM radio mode, touching short the button to choose a stored FM station "⏭" "Next song button:①On the Blue-tooth mode,touching short the button for a next song.②On the FM radio mode, touching short the button to choose a stored FM station. "⏸" "Play/Pause:①On the Blue-tooth mode,touching short the button to play or pause;②On the FM radio mode, touching short this button to select the station automatically and memory storage.③Touch and hold the button for 2 seconds to weaken the brightness of time screen. "⚙️" "Waking-up touch button:①Touching short the button to turn on,five-grade brightness adjustment,touching short it again to turn off,cycle operation.②Touch and hold this button for to turn ON/OFF the night light. "🌈" "Colorful light:①Touching short the button to choose and adjust single color.②Touch and hold for automatic cycle mode,color swith is fade-out effect.	 "🔊" "Volume Key: ①Turn left to decrease the volum,turn right to increase the volum. ②When the alarm rings,touching short the volum button to snooze.It will ring again after 10 minutes,alarm rings three times,the snooze function ends. ③When the alarm rings,touch and hold the volum to end the snooze function. ④Sleeping timer function,countdown 10 minutes,20 minutes, 30 minutes,00 stop sleeping timing.Normally,on the power on,blue-tooth speaker or FM radio mode,touching short the volum,turning on the sleep timer function,and it display "🌙" icon and sleeping time,the first short press,the sleeping time is 10 minutes "🌙"icon keep blinking,the second short press,the sleeping time is 20minutes"🌙"icon keep blinking "🌙"the third short press,the sleeping time is 30 minutes "🌙"icon keep blinking,the forth short press, to turn off the sleep timer function without blinking:On the sleep timer mode,if there is no any press for 5 seconds,the sleep timer starts working and the screen back to time.	"🔗" "Pairing button,touch and hold this button to quit forcefully and cancel the wireless pairing.Re-matching the Blue-tooth function. "🕒" "Time SET button,touch and hold SET for 2 second on time display mode,entry "12/24",the hour formate is blinking, short touching UP/DOWN to do Increase/decrease:Press SET again,the"hour" keeps blinking,short touching "UP/DOWN" to do increasing/decreasing:Press SET again.The"MINUTE" keeps blinking,short touching"UP/DOWN" to do increasing/decreasing.Short touching UP/DOWN to increase/decrease,long press to speed it up.If there is no any press for 8 seconds,then exit the time setting mode back to time display. (No any press for 8 seconds,exit the time setting back to time display) "🕒" "Alarm SET button,"🔔" "icon display or off accordingly. ①touch and hold SET for 2 second to entry Alarm setting mode,alarm "HOUR" keeps blinking,short touching "UP/DOWN" to do increase/decrease.Press SET again,the "MINUTE" keeps blinking,short touching"UP/DOWN" to do increasing/decreasing.Again short touching button to enter alarm ringings,then short touching press to select the alarm ringings ;short touching UP/DOWN to choose it.Short agin SET button to enter alarm mode,short touching UP/DOWN to choose which mode you like.Short agin SET button to set the Wake-up light time,short touching UP/DOWN to choose 10 minutes,20 minutes or 30 minutes in advance.Short touching SET button again to exit the alarm mode and back to time display mode. (No any press for 8 seconds,exit the time setting back to time display)	②Alarm mode:1.stands for Wake-up light+alarm 2.Alarm 3.Wake-up light ③Seven kinds alarm ringings,1~6 natural sounds,7 is radio. ④Wake-up time is 10/20/30 minutes,it shows"0:10/0:20/0:30: ⑤After turning on the radio,press play button to select the station automatically and memory storage,press"⏮" or "⏭" button to choose a stored radio station:Touch and hold for 2 seconds to exit the timing radio function. ⑥While the wake-up light become lighting slowly,no any function to press white light button or colorful light button unless the wake-up light is Max bright. "⬆️" "UP button:Adjust and increase button on time,alarm, touch and hold to speed it up. "⬇️" "Down button:Adjust and decrease button on time, alarm,touch and hold to decrease fast.	APP setting  (APP: WAKE UP LAMP)  Android  IOS ③ Equipment interface Click on the blue-tooth device name to connect it."✓" means it is being connected successfully.
b Music interface: App connected successfully music mode as below ★ Local music:Only available for local music library instead the third-party software's music library. 	★FMRadio Click "FM Radio"go into radio mode,as above.  Click the "< >"on the left and right,choose the different Radio frequency for different country,as below. 	 ①.Clicking on the right top searching icon"🔍", to select the station automatically and memory storage stations. ②.Clicking on the down left icon"☰" to check the stored stations and can choose to delet stations you don't like. ③.Clicking on the right down "♥️" icon to collect your favorite stations. ④.Clicking on bottom icon"⏮"to choose stored stations upward. ⑤.Clicking on the bottom icon"⏭"to choose stored stations downward. ⑥.Clicking on bottom icon"⏸"to play or pause the station is playing on. ⑦.Clicking on the icon 📶➡️" can adjust the HZ of radio,as above.	📶 Intelligent Lighting Interface  ①Clicking the first icon"💡" on the second line,it flashes,when playing the music,the light daning with the music,when it stops,the light is off.(Music flashes function only apply for on-line music,not available for FM mode.) ②Clicking the second icon on the second line,"🌈"color ligh on and change the color slowly and gradually,automatic cycle working all the time. ③.Clicking the third icon on the second line,"💡"color ligh on and change the color slowly and gradually,automatic cycle working all the time. ④..Clicking the fourth icon on the second line,"🌈"color ligh on and adjust color disk to chnage the color.Clicking the fourth icon on the second line,"🌈"color ligh on,flashes fash and change color ,automatic cycle working all the time. ⑤.Clicking the fifth icon"🌈"colorful light start brighting,and it is flashing quickling to change color,automatic cycle working all the time	⑥Clicking the sixth icon"🌈"on the secon line,the light on,and color changes slowly,automatic cycle working all the time ⑦Clicking the seventh icon"💡"on the second line,the brightness stays at level 1 and then adjust to the brightness "📊",slide the right side to strength the brightness and weaken the brightness to left. ⑧Clicking the second icon"🌈"on the third line,colorful light on.And it is on"🌈"by default,then adjust color disk."🌈" changes color,can also open the "🌈"icon ,shake the phone,it will change colors as well.Please click the third icon "🔇"on the third line,it will turn off the colorful light function. ⑨The color function of light,please click the color icon "🌈" "click the first "🔴"icon,light turns red,click the second "🟠"icon,light turns orange,click the third "🟡" icon,light truns yellow,click the fourth "🟢"icon,light turns green,click the fifth "🟡"icon,light turns blue,click the sixth "🟠"icon,light turns dark blue,click the seventh "🟡"icon, light turns purple. ⑩Clicking the fourth "💡" icon on the third line,wake-up white light start brighttling,when it arrived at the Max brightness,then adjust the brightness bar"📊"slide the right side to strength the brightness and weaken the brightness to left;please click the third icon"🔇" on the third line,it will turn off the wake-up white light function.
🔊 Sound effect Mode Interface  When playing the music,click the icon"🔊" to choose different Sound equalizer style according to your preference. There are different kinds of sound equalizer"🔊" "Music without being processed by an electronic device," "Jazz" "Jazz mode,suitable for rendering Jazz," "Pop" "Pop mode is suitable for rendering classical music." "Classical" "Classical music mode, " "Soft" "soft and casual mode,suitable for ordinary and noisy occasion," "Bass" "Bass mode.bass boost,bass effect," "Rock" "Rock music mode,suitable for rendering rock style music, " "User" "Customer pattern to adjust according to your preference. Note: This feature works only with Android software and is not supported on IOS software.	⌚ More interface(Alarm,rename,about)  🕒 Clicking the clock icon"🕒" Help > " enter timing function. 🕒 Clicking the timing music"🎵 Music Timer:start + ",set the start time " ① ",set which day on week to start music" ② "  ① ② (You can choose to open or close on which weekday).The music rings when music time is uo.(The volum is level 15 by default.)It support to open the local music library time setting.(Attention:if there is no music in the music library,please open the third party music app,for example,Kugou music app,start the music,then press the pause button,setrinf the time music function)The time music can be set to one group.	🕒 Clicking the music off "Music Timer:and+ ",set the time to stop music" ③ ",set which day to stop music" ④ ".  ③ ④ (You can choose to open or close on which weekday).The music is off when the stip time is up,the time music can be set just one group. 🕒 Clicking turn on light on time"Light ON Timer +",set the light turning on time"⑤"set which day to turn on the light"⑥ ".  ⑤ ⑥ (You can choose to open or close on which weekday)Time to turn on the light immediately ahead of 10 minutes,wake up the white light.For example,now the time is 8:05,so the set time will be 8:15,it means the time of seting must more than 10 minutes, can not be 10 minutes either)The time of light can be set to two group. 🕒 Clicking turn -off light on time"Light OFF Timer +",set the light turn off time"⑦"set which day in a weel to turn off the light. "⑧" Time to turn off the light immediately,the time of light off can be set to two group.	 ⑦ ⑧ (You can choose to open or close on which day)time to turn off the light immediately ,the time of light off can be set to two group 🕒 Clicking alarm clock, "Alarm Clock + "set alarm clock time"⑨" set alarm clock music"🎵",set which day in a week to start alarm clock"⑩"  ⑨ ⑩ ⑪ (You can choose to open or close on which day)Time to alarm clock,it will ring.(Ringtones include:Seven natural sounds+ radio)When the alarm clock rings,you can choose "turn off"or "5" minutes delay" on the handset prompt,the alarm clock function can be set to two group. ★ Attention:APP timing function can not be set at the same time to turn off the light,alarm clock,the setting time must be different,then APP can work properly.	